



# Duct Connected -High Static Pressure- FDU

## Model No.

FDU45KXE6F  
FDU56KXE6F  
FDU71KXE6F  
FDU90KXE6F  
FDU112KXE6F  
FDU140KXE6F  
FDU160KXE6F



## Remote control (option)

### Wired



RC-EX1A

RC-E5

RCH-E3

### Wireless




RCN-KIT3-E

## External Static Pressure(E.S.P) control

You can set External Static Pressure (E.S.P.) by method of manual setting on remote control. Indoor unit will control fan-speed to keep rated air flow volume at each fan speed setting. You can set required E.S.P. by wired remote control that calculated with the set air flow rate and pressure loss of the duct connected.



E.S.P. button  
External Static Pressure (E.S.P.) can be set by E.S.P. button.

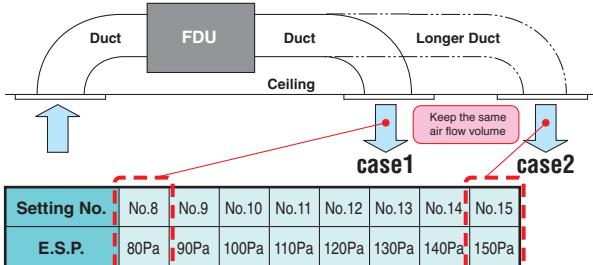

\*Range of 80~150 Pa is set at ex-factory default.

Range of 10~200 Pa is available by setting SW8-4 switch on at site.

## <Expansion of external static pressure range>

Previous                      Current  
10~130Pa    →    10~200Pa

## Thin design




	Previous	Current	
FDU71KXE6F	297	280	17mm less!!
FDU112/140KXE6F	350	280	70mm less!!

## Reduction of weight

	Previous	Current	
FDU71KXE6F	40	34	6kg less!!
FDU90KXE6F	63	34	29kg less!!
FDU112/140KXE6F	63	54	9kg less!!

## Reduction of sound pressure level

(FDU71KXE6F, in the Lo mode)

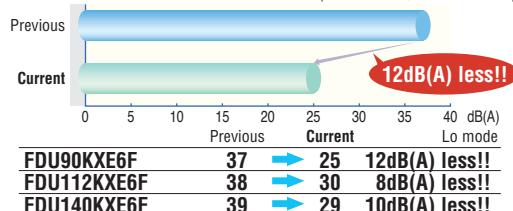

## Transparent inspection window

Dirt condition of the bottom of a drain pan can be checked through this transparent inspection window without removing drain pan. (Please refer to P28)

# Specifications

Item	Model	FDU45KXE6F	FDU56KXE6F	FDU71KXE6F	FDU90KXE6F	FDU112KXE6F	FDU140KXE6F	FDU160KXE6F
Nominal cooling capacity	kW	4.5	5.6	7.1	9.0	11.2	14.0	16.0
Nominal heating capacity	kW	5.0	6.3	8.0	10.0	12.5	16.0	18.0
Power source								
Power consumption	KW	0.10-0.10 / 0.10		0.24-0.25 / 0.24		0.31-0.32 / 0.31	0.35-0.36 / 0.35	0.42-0.43 / 0.42
Power consumption	Heating		0.10-0.10 / 0.10		0.24-0.25 / 0.24		0.31-0.32 / 0.31	0.35-0.36 / 0.35
Sound power level	dB(A)	60		65		—		
Sound pressure level *	dB(A)	Hi:32 Me:29 Lo:26		Hi:33 Me:29 Lo:25		Hi:38 Me:36 Lo:30	Hi:40 Me:34 Lo:29	Hi:40 Me:35 Lo:30
Exterior dimensions	mm	280x750x635		280x950x635		280x1370x740		
Net weight	kg	29		34		54		
Air flow *	m³/min	Hi:10 Me:9 Lo:8		Hi:19 Me:15 Lo:10		Hi:28 Me:25 Lo:19	Hi:32 Me:26 Lo:20	Hi:35 Me:28 Lo:22
Maximum external static pressure	Pa	200						
Outside air intake		Possible						
Air filter		Procure locally						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E						
Installation data	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")			Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")			
Refrigerant piping size								

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 60Pa.

2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

\* Powerful-Hi can be selected. Sound pressure level: FDU45/56 37dB(A), FDU71/90 38dB(A), FDU112 44dB(A), FDU140 45dB(A), FDU160 47dB(A). Air flow: FDU45/56 13m³/min, FDU71/90 24m³/min, FDU112 36m³/min, FDU140 39m³/min, FDU160 48m³/min.