





Duct Connected (Compact & Flexible) FDUH

Model No.

FDUH22KXE6F
FDUH28KXE6F
FDUH36KXE6F

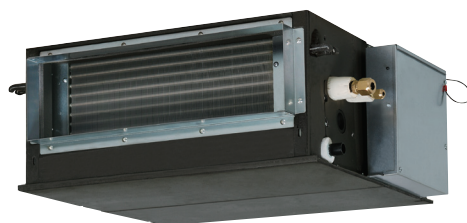

Drain up kit (option)
(600mm)

UH-DU-E

Filter kit (option)
UH-FL1E



*Filter pressure loss:5pa

Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-KIT3-E

Compact and thin size, light weight

Our leading high technology has realized the best solution for air conditioning in hotels with compact and thin size units and high energy efficiency. In addition, weight is only 20kg.




Quiet operation

The lowest sound level in the industry can ensure comfortable stay and rest in hotels.

Installation Flexibility

Control box and drain piping can be installed on both side of the unit and air intake to the unit is available from bottom or back side. Our highest technology can satisfy diverse installation requirements.

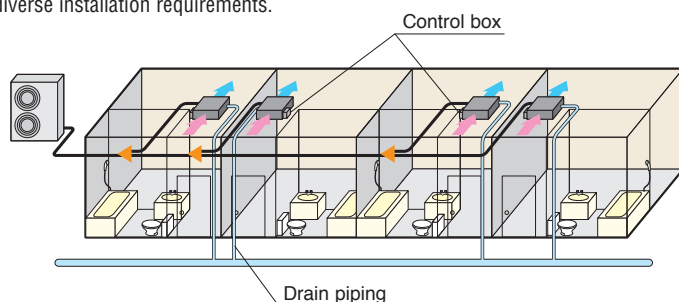

Wired remote control



**RCH-E3
(option)**

Simple remote control

Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

Specifications

Item	Model	FDUH22KXE6F	FDUH28KXE6F	FDUH36KXE6F
Nominal cooling capacity	kW	2.2	2.8	3.6
Nominal heating capacity	kW	2.5	3.2	4.0
Power source		1 Phase 220-240V, 50Hz / 220V, 60Hz		
Power consumption	Cooling	0.05-0.07 / 0.07		
	Heating	0.05-0.07 / 0.07		
Sound power level	dB(A)	60		
Sound pressure level※	dB(A)	Hi: 33 Me: 30 Lo: 27		
Exterior dimensions HxWxD	mm	257x570x530		
Net weight	kg	22		
Air flow ※	m ³ /min	Hi: 7 Me: 6.5 Lo: 6		
External static pressure	Pa	30		
Outside air intake		Possible from return duct		
Air filter		Filter kit:UH-FL1E(option)		
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E		
Installation data		Liquid line:ø6.35(1/4")		Liquid line:ø6.35(1/4")
	Refrigerant piping size	Gas line:ø9.52(3/8")		Gas line:ø12.7(1/2")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDUH22/28/36 39dB(A). Air flow: FDUH22/28/36 8.5m³/min.